

BT-PRIMER and PROTECTO-TAK SPRAY ADHESIVE DATA SHEET

DESCRIPTION:

BT-Primer and Protecto-Tak Spray Adhesive are high tack primers for use under the BT-Series products over Dens-Glass Gold*, all OSB board, black sheathing board, metal, wood, dry concrete and dry masonry. When used over Dens-Glass Gold*, BT-Primer is moisture tolerant and is suitable for use on moist or damp Dens-Glass Gold*. BT-Primer is VOC compliant.

PROPERTIES:

	BT-Primer	Protecto-Tak Spray Adhesive
Adhesion to wood	Excellent	Excellent
Adhesion to steel	Excellent	Excellent
Adhesion to dry concrete	Excellent	Excellent
Adhesion to dry masonry	Excellent	Excellent
Adhesion to membrane	Excellent	Excellent
Coverage	150 sq. ft./gal.	2 oz: 4" x 100' roll
Shelf life (min.)	One Year	One Year
Tack free time (minutes)	10-20 minutes	10 sec to 15 min
Flash Point	24°F TCC	-42°F TCC

DIRECTIONS FOR USE:

PREPARATION:

BEFORE HANDLING read material safety data sheets for health information.

- The surface shall be cleaned so that all dirt, dust, loose concrete, or other contaminants that may adversely affect the adhesion of the membrane are removed.

BT-PRIMER APPLICATION:

- Apply primer to all surfaces by roller or brush.
- Primed surface shall be free of runs, puddles or excessive primer as this could cause blistering. Brush or roll out all primer puddles or drips immediately.
- Prime only as much area as can be covered in half a day's work. Re-prime areas not covered in half a day's work with a light coat of BT-Primer.
- Tack free time is approximately 10 to 20 minutes.

NOTE: Some bubbling in the primer may occur on the surface as it cures. This has no effect on the performance of the product and will smooth out as the membranes are applied.

PROTECTO-TAK SPRAY ADHESIVE APPLICATION:

- Shake can before using.
- Turn spray tip so arrow points to dot on rim.
- Hold can 6 – 8 inches from surface to be sprayed and apply to surface.
- After use, invert can, depress spray tip until spray is free of adhesive. Clean spray tips with turpentine.
- Clean oversprayed areas with a mix of 25% - 30% water added to isopropyl alcohol.

PACKAGING AND WEIGHTS:

BT-PRIMER

QUANTITY	PACKAGING	WEIGHT
1 U.S. Gallon	4 gallons/carton	38 lbs
5 U.S. Gallon pail	1 pail	46 lbs

PROTECTO-TAK SPRAY ADHESIVE

QUANTITY	PACKAGING	WEIGHT
16.5 oz can	12 cans/carton	19 lbs

**Dens-Glass is a registered trademark of Georgia-Pacific Corporation*



**Premium Building Products
That Protect**

1955 South Cherokee St., Denver, Colorado 80223
(303) 777-3001 • Fax (303) 777-9273 • 1-800-759-9727
www.protectowrap.com



BT25XL Window and Door Sealing Tape

Forms a permanent waterproofing air/vapor seal around doors and windows that prevents air and moisture leaks.



- Stop moisture intrusion that causes black mold
- No special tools needed, peel and stick installation
- Meets or exceeds all building codes including ASTM 2112
- Meets or exceeds ICC Code Approval ESR1825
- The only flashing tape that passed hurricane level windblown rain test ASTM E331-90
- Adheres to vinyl, plywood, OSB, foam, metal, aluminum, and masonry
- Can be left exposed up to 120 days

Protecto Wrap's building tape **BT25XL** is a tough-faced superior self-adhering, air/vapor barrier and waterproofing membrane for vertical and horizontal above grade substrates. **BT25XL** seals window perimeters to building substrates to create an impenetrable barrier. This 20-mil polyethylene-backed aggressive rubberized adhesive membrane can be applied to vinyl, plywood, OSB, concrete, metal, aluminum, polyethylene, building wrap products, block and masonry surfaces to form an air/vapor moisture barrier system. **BT25XL is the only window sealing tape that can be installed and left exposed for 120 days without UV degradation.**

EASE OF INSTALLATION

Since BT25XL is a peel and stick self-adhering membrane, you simply center the tape over the area to be sealed and firmly **roll** the BT25XL against the surface. BT25XL also seals itself around nails, screws and staples.

ENERGY EFFICIENT

Not only will BT25XL waterproof around doors and windows, it stops air leakage, thus reducing heating and air conditioning costs to the homeowner.

Using this field tested product will prove that you are a builder who cares about providing the highest quality building materials to your customers.

Protecto Wrap's BT25XL is suitable for sealing the following applications:

- Window and door perimeters to the building substrate
- Joints in stucco insulation systems
- Sheet rock joints in roof assemblies
- Beneath metal cap flashings
- Full building coverage as an air/vapor barrier
- Sealing joints on gypsum sheathing in cavity wall construction
- Other areas where a water or air seal is required.

APPLICATION

There should be no solvent-based caulks used in conjunction with Protecto Wrap BT25XL.



Surfaces should be clean, dry, free of dirt and other foreign matter. For best results, BT25XL should be applied at a temperature above 45°F (7°C). For applications from 20°F to 45°F (-6°C to 7°C), the material must be stored in a warm area prior to use and used with Protecto Wrap BT-Primer or Protecto-Tak Spray Adhesive. When used as an air/vapor barrier system, all lap and butt joints must overlap a minimum of 4". Masonry ties should be placed on top of the BT25XL and sealed with Protecto Wrap's JS160H Mastic. Cut a piece of BT25XL in a length that can be easily handled. Begin application by removing approximately 12 inches of the release paper and center the tape over the area being sealed. **Firmly roll** the BT25XL against the surface and

continue pulling off the release paper while rolling the tape into place. Rolling the BT25XL is essential to gain 100% surface contact of the BT25XL adhesive to the substrate and will minimize trapping air beneath the tape. **Do not stretch BT25XL.** Lap building wrap material 4" on top of BT25XL and seal the building wrap to BT25XL.


NOTE: When applying BT25XL to masonry, concrete, black sheathing board and OSB products or Dens-Glass Gold*, the surface must be primed with Protecto Wrap BT-Primer or Protecto-Tak Spray Adhesive.

*Dens-Glass is a registered trademark of Georgia-Pacific Corporation


WINDOW APPLICATION

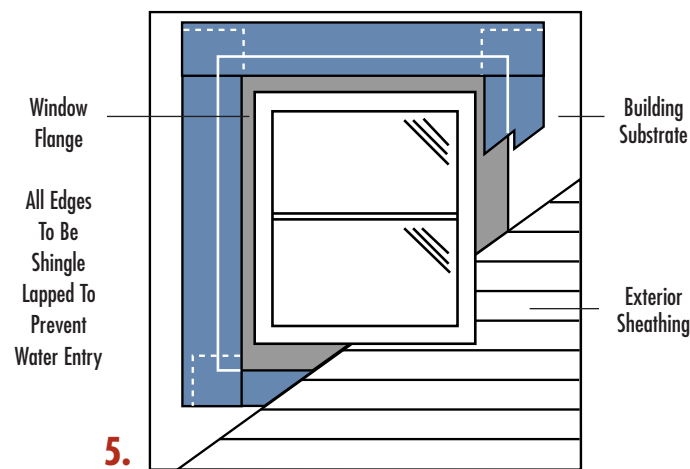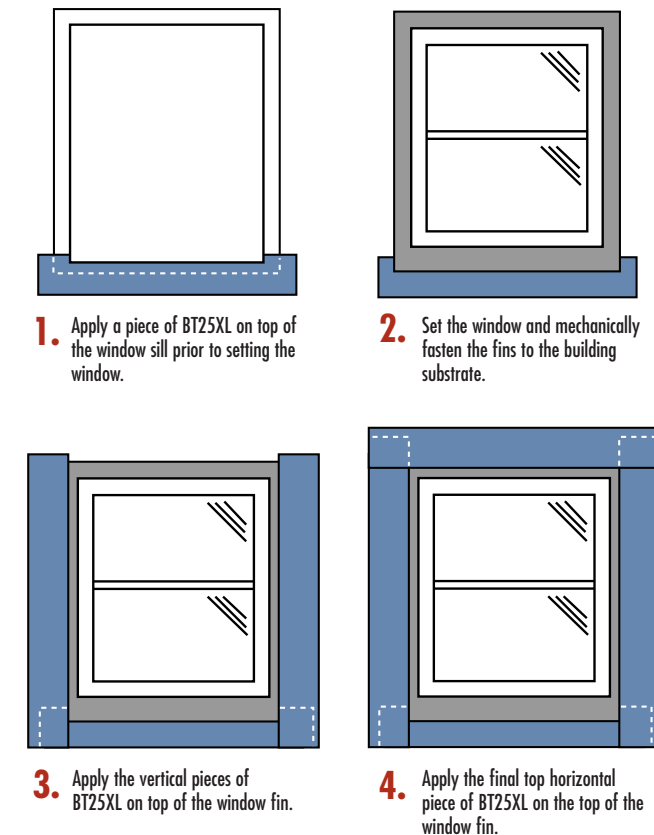


BT25XL as a Seam Sealing Tape

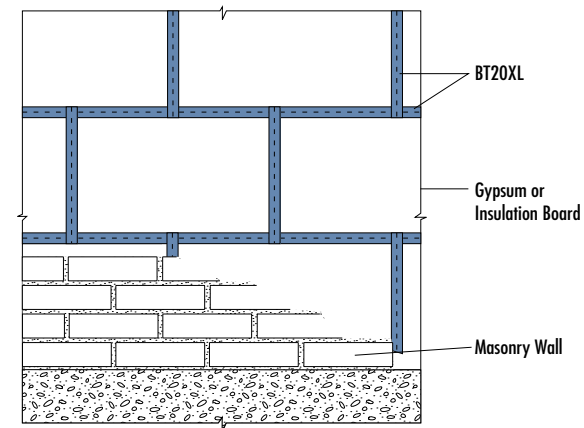

BT25XL for Cavity Wall Protection

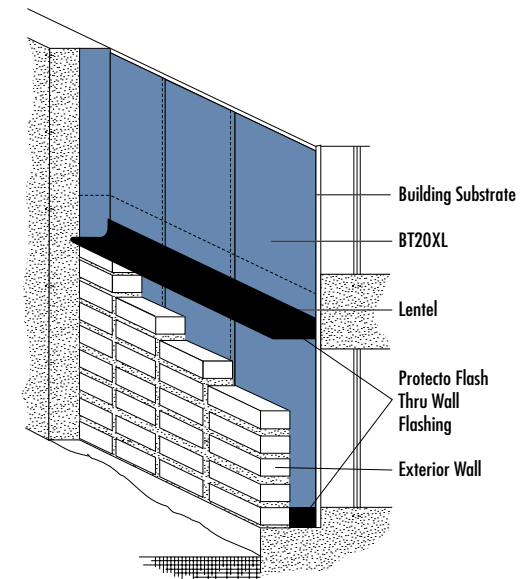

BT25XL as a Thru-Wall Flashing

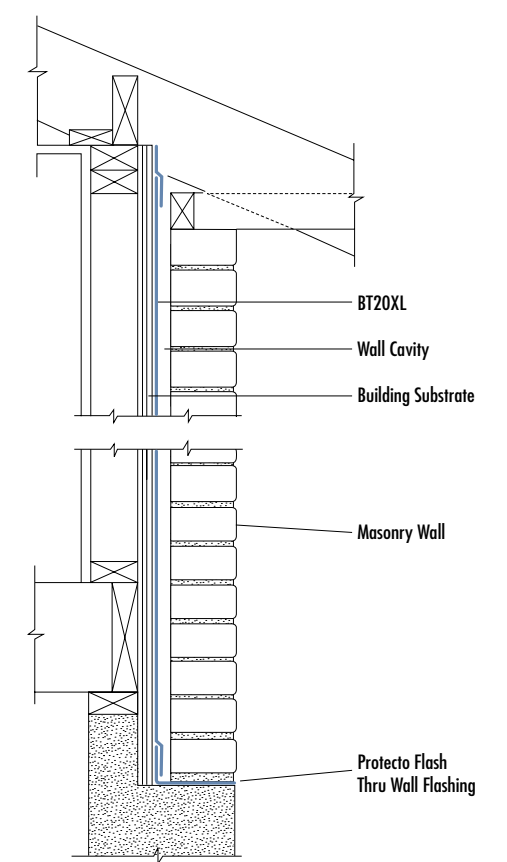

TESTING

BT25XL is the only flashing tape to pass hurricane level wind-driven rain testing. (ASTM E331-90, test method for water penetration of exterior windows.) Meets ASTM 2112. Meets or exceeds ICC Code Approval ESR1825.

PROPERTIES

Property	Value	Test Method
Color:	White	
Thickness:	25+ mils	
Tensile Strength:	975 psi	ASTM D412
Elongation:	over 500% (rubberized adhesive only)	ASTM D412
Moisture Vapor Transmission Rate:	0.01 perms max.	ASTM E96
Max. Exposure Time:	120 Days	

PRECAUTIONS

1. Rolling the BT25XL is essential to gain 100% surface contact of the BT25XL adhesive to the substrate and will minimize trapping air beneath the tape.
2. When Protecto Wrap's BT25XL is used as an air/vapor barrier, the dew point must be engineered to the exterior of the building.
3. Care should be taken not to leave the membrane exposed to direct sunlight for over 120 days.
4. Any caulking that contains solvents must not be used on or around the BT25XL membrane.
5. Do not stretch BT25XL. Stretching will adversely affect the adhesion of the product.
6. BT-Primer or Protecto-Tak Spray Adhesive must be used in applications with temperatures below 45°F (7°C).
7. BT-Primer or Protecto-Tak Spray Adhesive must be used on weathered surfaces, masonry, concrete and Dens-Glass Gold*, black sheathing board and OSB.
8. Some chemicals used in the production of OSB may adversely affect the adhesion of BT25XL. BT-Primer or Protecto-Tak Spray Adhesive will enhance the adhesion of BT25XL to OSB.
9. BT25XL must be stored in a location with temperatures above 50°F (10°C).
10. Protecto Wrap's EIFS Tape is recommended if stucco is to be applied directly to the air/vapor barrier.